


# UHF Mask Filter

## 6 KW Modules

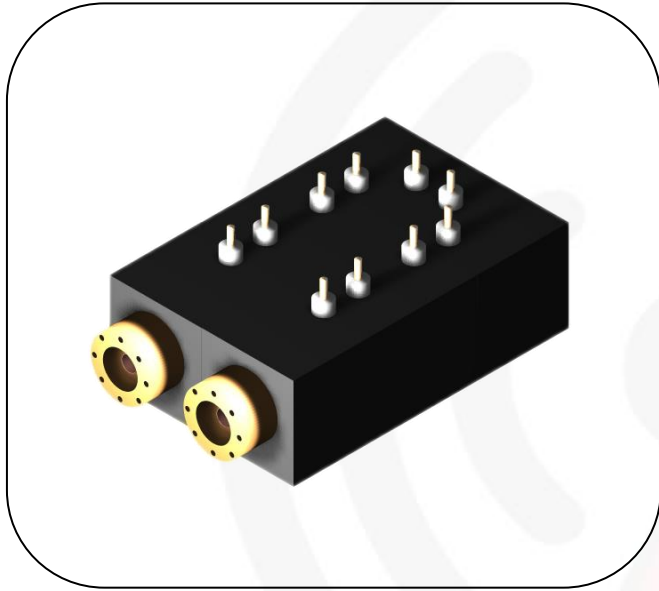

- Frequency: 470 – 860 MHz
- Cross Coupled
- High quality aluminum, brass, and copper materials.
- Digital or Analog Systems
- No finger stock used
- 6 MHz, 7 MHz, or 8 MHz Bandwidth

## SPECIFICATIONS

<i>Frequency</i>	470 – 860 MHz	<i>Connections Available:</i>	EIA Flange
<i>Input Power Rating</i>	6 KW		
<i>Insertion Loss</i>	< 0.8 dB		
<i>Cooling Method</i>	Conventional or Forced		
<i>Rejection</i>	> 50 dB		
<i>Group Delay</i>	300 ns		

## STANDARD MODELS

<b>Model</b>	<b>Power Rating</b>	<b>6-Cavity</b>	
UHF-M-6	6 KW	16" x 28" x 15"	190 lbs.

*Operating Altitude*      Ratings are based on elevations up to 2800'. Derating begins after 2800'